



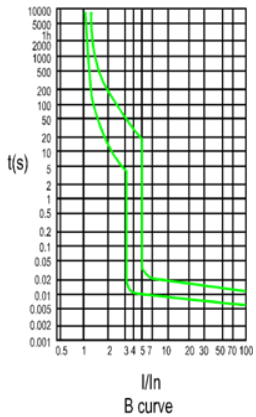

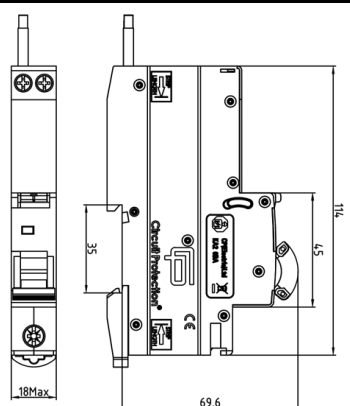


		BARCODE    	
RCBO <b>RT063230B</b>		5 060523 520381	
TECHNICAL		TRIPPING CHARACTERISTICS	
Specification	<b>RCBO</b>		
Standard	BS EN 61009-1		
Number of Poles	1P + N		
Tripping Characteristics	B curve= 3-5I <sub>n</sub> C curve= 5-10I <sub>n</sub>		
Tripping Type	Electronic		
Rated Breaking Capacity (I <sub>cu</sub> )	6kA		
Rated Current (I <sub>n</sub> )	6 - 50A		
Rated Voltage (U <sub>n</sub> /AC)	230V		
Residual Current Characteristics	AC		
Rated Residual Operating Current (I <sub>Δn</sub> )	0.03		
Frequency (Hz)	50/60		
Mechanical Endurance	20,000		
Protection Degree	IP20		
Terminal Size (mm <sup>2</sup> )	1 - 16 (L IN) 1 - 10 (Load: Nout Lout)		
Tightening Torque (Nm)	2.5 (L IN) 1.2 (Load: Nout Lout)		
Operating Temperature °C	-25~ +40°C		
Storage Temperature °C	-25~ +70°C		
RCBO 		DIMENSIONS	
			
<b>PRODUCT DATA</b>			
PART NUMBER	RT063230B		
BARCODE	5060523520381		
DESCRIPTION	32A 30mA B TYPE 6kA RCBO		
VOLTAGE	230V 50/60Hz		
MAXIMUM LOAD	32A		
TERMINAL CAPACITY	1-16mm <sup>2</sup> L in, 1-10mm <sup>2</sup> Lout/Nout		
IP RATING	20		
STANDARD	BS EN 61009-1		
WEIGHT (1PC) Kg	0.2		
INNER CARTON QUANTITY	1		
OUTER CARTON QUANTITY	60		
ORIGIN OF MANUFACTURE	CHINA		
		Moorfield Industrial Estate, Kilmarnock, KA2 0BA 01563 533554 sales@cpelectric.co.uk www.cpelectric.co.uk FuseBox is the trading name of CP (Electric) Limited SC553729	